


## BT-F048

### 1. Instruction

BT-F series bi-telecentric lens have been specifically designed to fit 35mm format(36×24mm) detectors with very high resolution, such as 11, 16 or 29MPX. This series bi-telecentric lens are also perfectly suitable for 2kpx、4kpx and 6kpx lines can cameras.

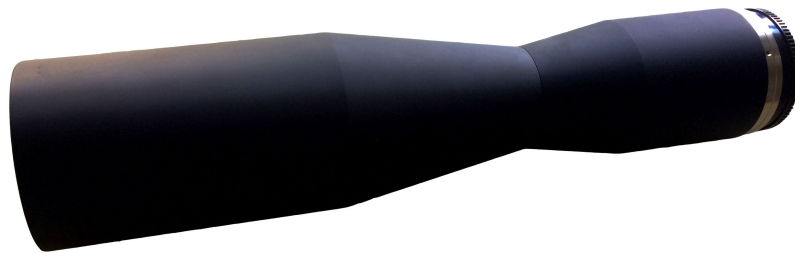

## 2. System Parameter


<b>Part number</b>		BT-F048	
<b>Mag.(x)</b>		0.751	
<b>Detector type(mm)</b>	<b>35mm w*h</b>	48.0*32.0	
	<b>Line scan</b>	Line -2K (14 $\mu$ ·28.672)	38.2
		Line -4K (7 $\mu$ ·28.672)	38.2
		Line -6K (7 $\mu$ ·43.008)	57.3
<b>F#</b>		16	
<b>Telecentricity Typical(max) (deg.)</b>		<0.06	
<b>W.D. (mm)</b>		127 $\pm$ 3%	
<b>Field Depth (mm)</b>		2	
<b>Distortion Typical(max) (%)</b>		<0.06(0.10)	
<b>Mount</b>		F	
<b>Length (mm)</b>		335.4	
<b>Dian <math>\Phi</math> (mm)</b>		80	
<b>Weight (kg)</b>		1.9	

Hot line: 400-0651-516 Tel: 029-83262398

Beijing: 010-51296331 Shenzhen: 075-25900740

Contact us for details: 3rd Floor E, 1st Plant, New Urban Science Technology Industry Park, Gaoxin District, Xi'an China 710043

### 3. Sketch map

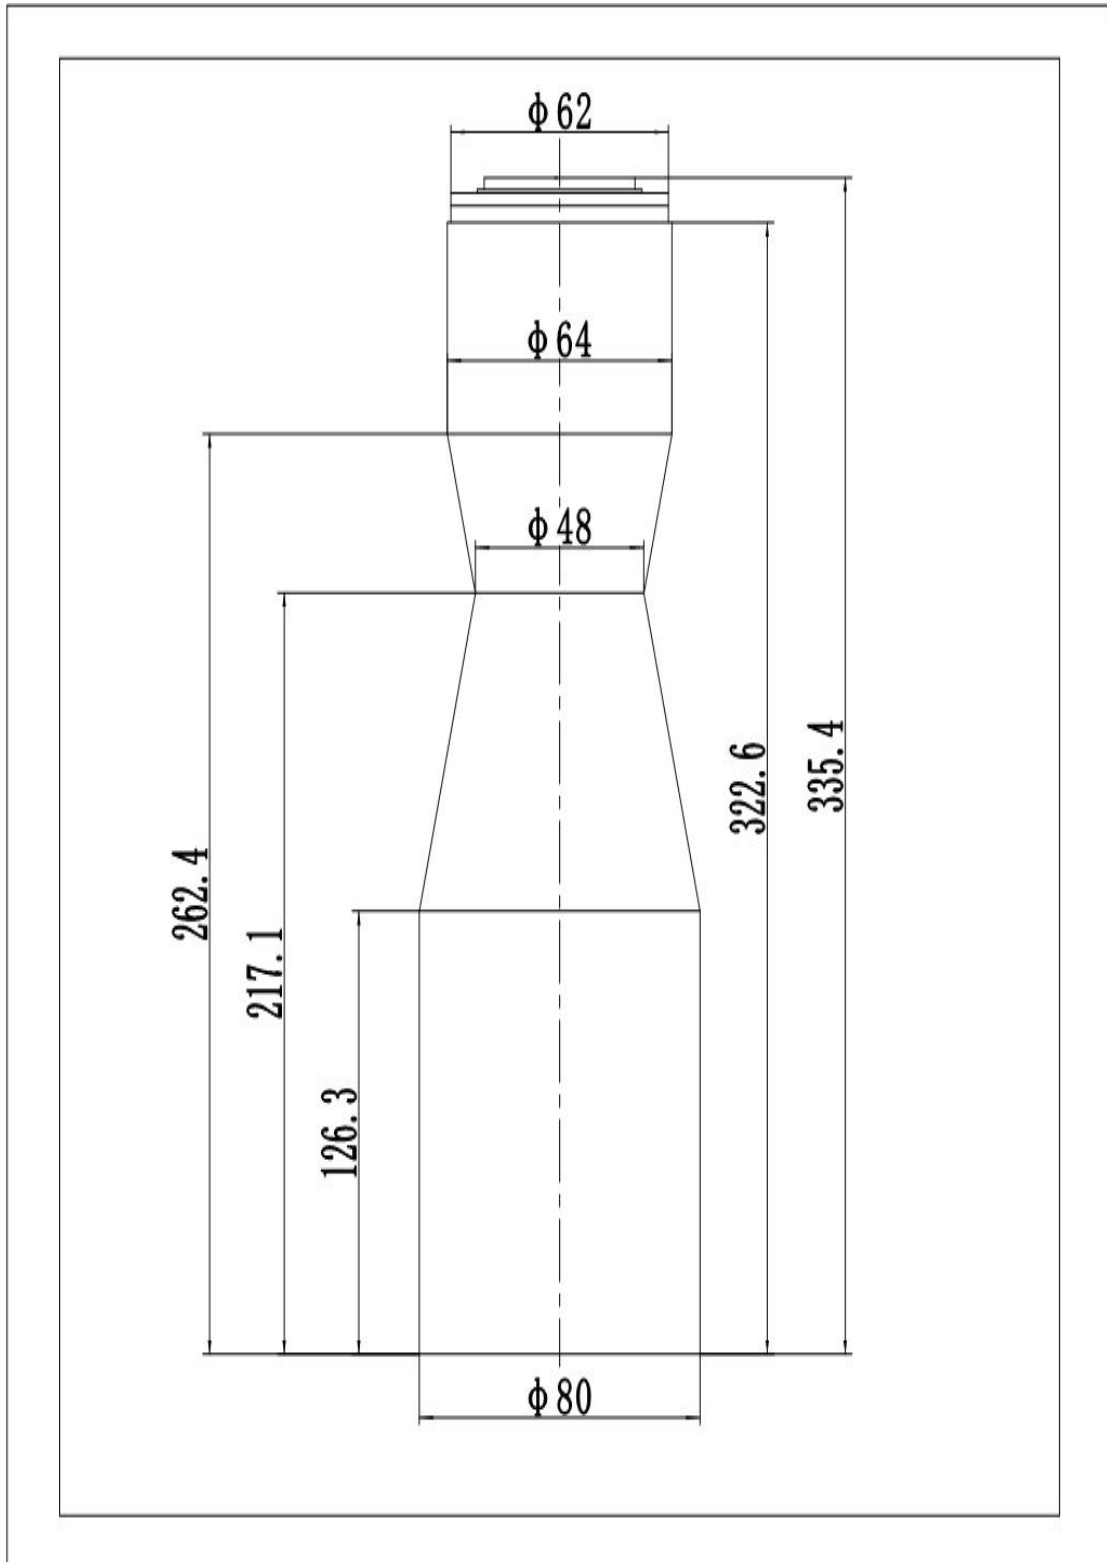

Hot line: 400-0651-516 Tel: 029-83262398

Beijing: 010-51296331 Shenzhen: 075-25900740

Contact us for details: 3rd Floor E, 1st Plant, New Urban Science Technology Industry Park, Gaoxin District, Xi'an China 710043